

PERFORMANCE

°C %RH	26.7 60	23.9 50
Water Removal (L/Day)	44	29
Efficiency (P/kWh)	6.7	5.0
Energy Factor (L/kWh)	3.2	2.4

ELECTRICAL


°C %RH	26.7 60
Supply Voltage	230V
Current Draw	2.5A
MCA*	15A
MOP*	15A
Recommended Breaker Size	10A (EU, AUS, ZA) 13A (UK)
Power	733W
Power Cord	20' FEM IEC 60320-C13
Plug Type:	UK BS 1363-TYPE G AUS AS3112-TYPE I EU CEE 7/7-TYPE E & F
CFM	280
BTU (Total)	6,200
BTU (Motor Load)	2,000
BTU (Heat of Condensation)	4,200

SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R454B
Refrigerant Amount	17 oz (.48 kg)
Weight	27.2 kg
Air Filter MERV Rating	MERV-13
Dimensions	30.5 x 35.6 x 2.5 cm
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	13.3°C Min - 35°C Max



DIMENSIONS

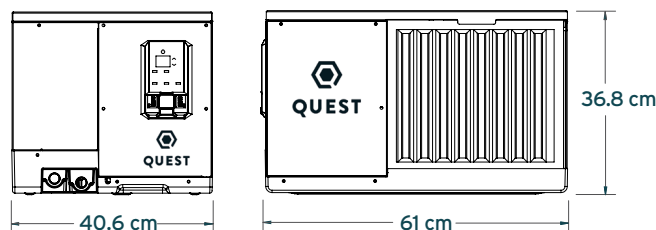

FEATURES

- + **Patented M-CoRR™ Technology:** proprietary multi-coil design achieves highest efficiencies available in the market
- + **Digital Onboard Control:** easy operation of your machine, with optional external control
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as pollen, mold, bacteria, and some viruses
- + **Low Amp Draw:** freeing up electricity for other equipment on your electrical panel
- + **Plug and Play:** operates on standard 230V outlet with no drain trap required

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.