



375 50HZ | PN 4046200-XX

PERFORMANCE

°C %RH	26.7 60	23.9 50
Water Removal (L/Day)	170	109
Efficiency (P/kWh)	7.6	5.4
Energy Factor (L/kWh)	3.6	2.6

ELECTRICAL


°C %RH	26.7 60
Supply Voltage	230V
Current Draw	9.3A
MCA*	15A
MOP*	20A
Recommended Breaker Size	16A (EU, AUS, ZA) 13A (UK)
Power	2,550W
Power Cord	14/3, SJTW (6')
Plug	UK BS 1363-TYPE G AUS AS3112-TYPE I EU CEE 7/7-TYPE E & F
CFM	950
BTU (Total)	23,100
BTU (Motor Load)	6,700
BTU (Heat of Condensation)	16,400

SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R454b
Refrigerant Amount	62 oz (1.8 kg)
Weight	97.5 kg
Air Filter MERV Rating	MERV-13
Dimensions	50.8 x 55.9 x 5.1 cm
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	13.3 °C Min - 35 °C Max



DIMENSIONS

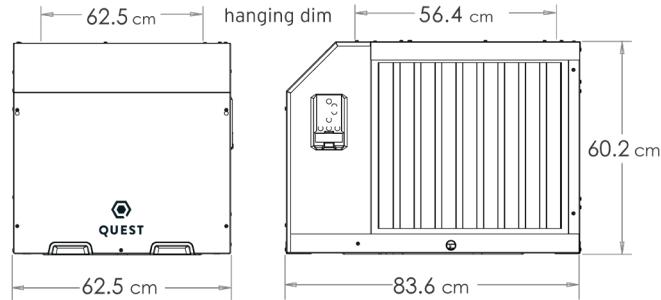

FEATURES

- + **Patented M-CoRR™ Technology:** achieves highest efficiencies available in the market
- + **Digital Onboard Control:** easy operation of the machine, with optional external control
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as mold, bacteria, and some viruses
- + **Integrated Lift and Hang Points:** allow for easy movement and flexible installation
- + **Easy Access Panel:** removable panel for easier in-place maintenance and serviceability

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.

QUESTCLIMATE.COM / (877) 420-1330

